

A / REISSUE

Please type a plus sign (+) inside this box → ☐

PTO/SB/50 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0033  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

02/02/99

542 U.S. PTO

jc551 U.S. PTO  
09/24/1989  
02/02/99

## REISSUE PATENT APPLICATION TRANSMITTAL

Address to:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

Attorney Docket No.	JA992-011 (8728-231)
First Named Inventor	Suzuki et al.
Original Patent Number	5,600,462
Original Patent Issue Date (Month/Day/Year)	February 4, 1997
Express Mail Label No.	

APPLICATION FOR REISSUE OF:  
(check applicable box)



Utility Patent



Design Patent



Plant Patent

### APPLICATION ELEMENTS

- ☒ \* Fee Transmittal Form (PTO/SB/56)  
(Submit an original, and a duplicate for fee processing)
- ☒ Specification and Claims (amended, if appropriate)
- ☒ Drawing(s) (proposed amendments, if appropriate)
- ☒ Reissue Oath / Declaration (original or copy)  
(37 C.F.R. § 1.175)(PTO/SB/51 or 52)
- Original U.S. Patent  
☐ Offer to Surrender Original Patent (37 C.F.R. § 1.178)  
(PTO/SB/53 or PTO/SB/54)  
or  
☐ Ribboned Original Patent Grant  
☐ Affidavit / Declaration of Loss (PTO/SB/55)
- Original U.S. Patent currently assigned?  
☒ Yes ☐ No  
(If Yes, check applicable box(es))  
☒ Written Consent of all Assignees (PTO/SB/53 or 54)  
☒ 37 C.F.R. § 3.73(b) Statement ☒ Power of Attorney

### ACCOMPANYING APPLICATION PARTS

- ☒ Foreign Priority Claim (35 U.S.C. 119)  
(if applicable) JP 4-246225, 9/16/92
- ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
- ☐ English Translation of Reissue Oath/Declaration  
(if applicable)
- \* Small Entity ☐ Statement filed in prior application,  
Statement(s) ☐ Status still proper and desired  
(PTO/SB/09-12)
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
- ☒ Other: Associate Power of Attorney

\* NOTE FOR ITEMS 1 & 10: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.17). EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.22).

### 14. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

Name	Frank Chau				
	F. Chau & Associates, LLP				
Address	1900 Hempstead Turnpike, Suite 501				
City	East Meadow	State	New York	Zip Code	11554
Country	USA	Telephone	516-357-0091	Fax	516-357-0092

NAME (Print/Type)	Frank Chau	Registration No. (Attorney/Agent)	34,136
Signature		Date	2/1/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

# OPTICAL FILM AND LIQUID CRYSTAL DISPLAY DEVICE USING THE FILM

## FIELD OF THE INVENTION

This invention relates to liquid crystal displays. More particularly it relates to an optical film used in a liquid crystal display (LCD) device and an LCD device including an LCD panel and back light device having the optical film, so as to increase luminance of light within the viewing angle.

## BACKGROUND OF THE INVENTION

An LCD device includes an LCD panel, polarizers, a backlight device, and an LCD driver circuit. The backlight device includes one or two fluorescent lamps, and a light guide. The light guide receives light from the fluorescent lamp to transmit light of uniform luminance to the LCD panel.

The light guide has a lower surface for performing diffuse reflection and an upper surface for performing diffuse transmission, whereby light of uniform luminance is directed to the LCD panel from the upper surface.

To enhance the uniformity of the light, various technologies have been developed. One of these technologies is shown in Japanese utility model application 61-197685 (Published unexamined utility model application 63-101921), wherein a backlight device includes a diffuse transmission plate facing an LCD panel, a backside reflector and a lamp positioned between the diffuse transmission plate and the backside reflector. A center portion of the diffuse transmission plate has a Fresnel lens arranged parallel to the lamp.

Recently, color LCD devices used in portable personal computers have required a backlight device of high luminance and low power consumption. The high luminance and the low power consumption are inconsistent with each other, because as small a battery as possible is required in a portable personal computer.

Further, recently portable personal computers have been reduced to A4 size. The size of the LCD device, and particularly the size of the backlight device, must also be reduced.

U.S. Pat. No. 4,906,070 discloses a thin flexible film made of a transparent polymeric material including a structured surface and an opposite smooth surface, wherein light striking either surface within certain angular ranges, is totally internally reflected. The structured surface includes a linear array of miniature substantially right angled isosceles prisms arranged side-by-side to form a plurality of peaks of grooves. Viewed in a broad conceptual sense, the structured surface of the film described in this patent may be perceived as resembling the structure of one surface of the optical film of the present invention. However, the optical film of the present invention differs remarkably from the film disclosed in U.S. Pat. No. 4,906,070. Further, the use of the optical film in the particular position in the LCD device according to the present invention is not disclosed or suggested by this patent.

## SUMMARY OF THE INVENTION

It is an object of the invention to provide a high luminance and small size backlight device for the color LCD used in portable personal computers.

## 2

In accordance with the invention, an optical film of transparent material comprises a first surface having a wave structure including a plurality of isosceles triangle prisms arranged side-by-side, and a second surface having an optically rough structure for performing diffuse transmission. A top angle of said isosceles triangle prisms is in a range of 95 degrees to 120 degrees.

An optical film of transparent material of the present invention may also comprise a first surface having a structure including a plurality of quadrangular prisms arranged side-by-side, and a second surface having an optically rough structure for performing diffuse transmission. A top angle of said quadrangular prisms is in the range of 95 degrees to 120 degrees.

The liquid crystal display device of the present invention includes a liquid crystal display panel and a back light device. The back light device comprises a light source for emitting light; a light guide means having a top surface facing a back surface of the liquid crystal display panel and a side surface receiving the light from said light source; a reflector means provided on a back surface of the light guide means; and an optical film of transparent material positioned between the back surface of the liquid crystal display panel and the top surface of the light guide means, including a first surface having a wave structure including a plurality of isosceles triangle prisms arranged side-by-side and a second surface having an optically rough structure for performing diffuse transmission. A top angle of the isosceles triangle prisms is in the range of 95 degrees to 120 degrees. A polarizer is positioned between the liquid crystal display panel and the optical film. The direction along which peaks and valleys of the isosceles triangle prisms are oriented is aligned in parallel to a polarizing axis of the polarizer.

The liquid crystal display device of the present invention also includes a liquid crystal display panel and a back light device wherein the back light device comprises a light source for emitting light; a light guide means having a top surface facing a back surface of the liquid crystal display panel and a side surface receiving the light from said light source; a reflector means provided on a back surface of the light guide means; and two optical films of transparent material positioned between the back surface of the liquid crystal display panel and the top surface of the light guide means, each of the optical films including a first surface having a wave structure including a plurality isosceles triangle prisms arranged side-by-side and a second surface having an optically rough structure for performing diffuse transmission. A top angle of the isosceles triangle prisms is in the range of 95 degree to 120 degrees.

The direction along which peaks and valleys of the isosceles triangle prisms of one of the two optical films are oriented is at an angle with respect to a direction along which peaks and valleys of the isosceles triangle prisms of the other of the two optical films are oriented.

A polarizer is positioned between the liquid crystal display panel and the two films, and the direction along which the peaks and valleys of the isosceles triangles prisms of the optical film nearer to said polarizer is oriented is parallel to a polarizing axis of the polarizer.

The liquid crystal display device of the present invention also includes a liquid crystal display panel and a back light device wherein the back light device comprises a light source for emitting light; a light guide means having a top surface facing a back surface of the liquid crystal display panel and a side surface receiving the light from the light source; a reflector means provided on a back surface of the

light guide means; and an optical film of transparent material positioned between the liquid crystal display panel and the light guide means, including a first surface having a structure including a plurality of quadrangular prisms arranged side-by-side and a second surface having an optically rough structure for performing diffuse transmission. A top angle of the quadrangular prisms is in the range of 95 degrees to 120 degrees.

A polarizer is positioned between the liquid crystal display panel and the optical film. The direction along which peaks and valleys of the quadrangular prisms of the optical film is parallel is oriented to a polarizing axis of said polarizer.

The liquid crystal display device of the present invention also includes a liquid crystal display panel and a back light device wherein the light device comprises a light source for emitting light; a light guide means of transparent material having a top surface facing a back surface of the liquid crystal display panel, a bottom surface and a side surface receiving the light from the light source; a reflector means provided on a back surface of the light guide means; and a film of material performing diffuse transmission formed on an edge area of the bottom surface of said light guide means adjacent to said light source.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic cross sectional view of an LCD device in accordance with the present invention.

FIG. 2 is a plan view of the light guide of the present invention.

FIG. 3 is an enlarged cross sectional view of a portion of the LCD device of the present invention.

FIG. 4 is an perspective view of the structure of the optical film of the present invention.

FIG. 5 illustrates various light paths in the optical film of the present invention.

FIG. 6 illustrates the characteristic curves of the optical film of the present invention.

FIG. 7 illustrates additional characteristic curves of the optical film of the present invention.

FIG. 8 is a schematic representation of a first arrangement according to present invention.

FIG. 9 is a schematic representation of a second arrangement according to the present invention.

FIG. 10 is a schematic representation of a third arrangement according to the present invention.

FIG. 11 illustrates further characteristic curves of the optical films of the present invention.

FIG. 12 is a schematic representation of a fourth arrangement according to present invention.

FIG. 13 is a schematic representation of a fifth arrangement according to the present invention.

FIG. 14 illustrates an alternative structure of the optical film of the present invention.

FIG. 15 is an enlarged cross sectional view of a prior art structure.

FIG. 16 is an enlarged cross sectional view of a structure in accordance with the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 shows an LCD device which comprises an LCD glass panel 1, polarizers 4 and 5 and a backlight device 6.

The LCD glass panel 1 includes two glass substrates 2 and 3, peripheral edges of which are sealed by an edge seal 11, such as epoxy resin, and liquid crystal material retained between the glass substrates 2 and 3. The polarizing axis of polarizer 4 is perpendicular to the polarizing axis of polarizer 5.

The backlight device 6 includes fluorescent lamps 7, a light guide 8 and a thin optical film 9. The light guide 8 is made of transparent material, such as polymethylmethacrylate. On a first or bottom surface of the light guide 8, a reflective dot pattern of a reflective material e.g. alumina is printed, as shown in FIG. 2. The size of the printed dots are varied from about 2 mm at the center portion to about 1.2 mm at the peripheral portion. The second or upper surface of the light guide 8 is not provided with the printed dots. The second surface of the light guide faces the optical film 9, as shown in FIG. 3. Each dot performs a diffuse reflection which is shown by a reference number 31.

The printed dots cause the light from the fluorescent lamps 7 to be reflected toward the LCD panel 1 with substantially uniform luminance.

The structure of the optical film 9 is shown in FIGS. 4 and 5. The optical film 9 is made of a transparent material which has a total transmission equal to or more than 98% and a refractive index of 1.5 to realize a large critical angle from the material to air. Examples of materials for the optical film 9 are polymethylmethacrylate or polycarbonate.

A lower or first surface of the optical film 9 has an optically rugged or rough structure which is similar to the surface of frosted glass. The optically rough structure is required to provide a diffuse transmission wherein light of the same intensity or luminance is diffused in substantially all directions within a range of 180 degrees, as shown by a reference number 32 in FIG. 3. The distance between peaks of the rough structure is about 10 micrometers. If the first or bottom surface is optically smooth, diffuse transmission does not occur. Diffuse transmission at the first surface is required to prevent the printed dot pattern of the light guide 8 from being observed by an operator. More particularly, the light from the fluorescent lamps 7 is diffuse-reflected at each dot. The light is diffused by the diffuse transmission of the optically rough structure of the optical film 9. If the optically rough structure is not formed on the first surfaces of the optical film 9, the printed dot pattern of the light guide 8 is observed by human eyes. This degrades the quality of a displayed image.

An upper or second surface of the optical film 9 has a wave structure, as shown in FIGS. 3, 4 and 5, which includes a plurality of isosceles triangle prisms arranged side-by-side with peaks and valleys being arranged in parallel to each other.

In order to decrease loss of light transmitted to the LCD panel 1, the direction of the peaks and valleys is aligned with a polarizing axis 5A of the polarizer 5, as described below with refer to FIGS. 8, 9, 10 and 12.

FIG. 5 shows various light paths inside and outside of the optical film 9. As described below, the incidental light into the rough structure of the bottom of the optical film 9 is diffuse-transmitted. The diffused light 55, 56, 57, 58 reaches surfaces 51, 52 at various angles and is refracted, as shown in FIG. 5. The refracted light 55A, 56A, 57A, 58A is gathered within a range defined by an angle 2A.

Angle A depends upon the top angle B of the isosceles triangle prism, as shown in FIG. 6 and 7, which illustrate experimentally measured results.

Before describing the curves in FIG. 6, the viewing angle of the LCD device is described. As well known in the art, the

## 5

viewing angle is defined as an angle with respect to a line normal to the surface of the LCD device at which an image displayed on the LCD device can be satisfactorily observed by the operator. The viewing angle in the vertical direction is at least  $\pm 35$  degrees, and the viewing angle in the horizontal direction is approximately  $\pm 55$  degrees. The light from the fluorescent lamps is gathered within the viewing angle of the LCD device by the optical film 9 of the present invention. In other words, the luminance of light within the viewing angle of the LCD device is increased and the luminance of light outside the viewing angle of the LCD device is decreased by the optical film 9.

Referring again to FIG. 6, the vertical axis represents the relative luminance (represented as a percentage), and the horizontal axis represents the angle A. Angle A was measured by arranging the peaks and valleys of the optical film 9 in the horizontal direction of the LCD panel 1 and by rotating the LCD device around an axis 81, as shown in FIG. 8. Since the purpose of the FIGS. 8, 9, 10, 12 and 13 is to show the direction of peaks and valleys of the optical film 9 or 10 with respect to the polarizing axis 5A of the polarizer 5 and the LCD panel 1, the polarizer 4 and the backlight device 6 are not shown in these figures.

The value 100% on the vertical axis in FIG. 6 represents the luminance when the optical film 9 is not inserted between the polarizer 5 and the light guide 8. The five curves represent the cases of various top angles B of the isosceles triangle prism of the optical film 9. It is apparent in FIG. 6 that the luminance within the particular angle is increased by inserting the optical film 9 between the polarizer 5 and the light guide 8. The increase of the luminance is caused by the light gathering effect of the optical film 9.

In accordance with the present invention, a preferred top angle B is 95 degrees to 120 degrees, for the following reasons.

Comparing the five curves, in the case of the angle B=90 degrees, the luminance at the required vertical viewing angle A=35 degrees is 30%. The luminance required for a practical use of the LCD device for providing a minimum image quality is 65-70%. Therefore, the luminance of 30% at a top angle B=90 degrees at A=35 degrees causes a degradation of image quality. The luminance of the angle B=95 degrees at the view angle A=35 degrees is 70%, so that the required minimum image quality is realized.

The curve of B=120 degrees shows a highest luminance value of 117%. But, if the angle B is more than 120 degrees, the luminance is decreased to a level of approximately 100%, and there is less merit in using the optical film 9. Based upon this discovery, the upper limit of the angle B is selected to be 120 degrees.

FIG. 7 shows the relationship between the relative luminance and the angle A measured by arranging the peaks and valleys of the optical film 9 in the horizontal direction of the LCD panel 1 and by rotating the LCD device around an axis 82, as shown in FIG. 8. The value of 100% on the vertical axis in FIG. 7 represents a luminance when the optical film 9 is not inserted between the polarizer 5 and the light guide 8.

Comparing the five curves in FIG. 7; in the case of the angle B=90 degrees, the luminance at the required horizontal viewing angle A=55 degrees is 30%. In the case of the angle B=95 degrees, the luminance at the viewing angle A=55 degrees is 65%. Since the luminance required for the practical use of the LCD device for providing a minimum image quality is 65-70%, as stated above, the angle B=95 degrees is selected.

The curve of  $B=120$  degrees shows a highest luminance value of 115%. If an angle  $B$  of more than 120 degrees is used, the luminance is decreased to approximately 100%. Based upon this discovery, the upper limit of the angle  $B$  is selected to be 120 degrees.

Based upon the experimental data shown in the FIGS. 6 and 7, the preferred top angle  $B$  is from 95 degrees to 120 degrees.

FIG. 11 shows four characteristic curves 84, 85, 86 and 87. Curve 84 was obtained by rotating the arrangement shown in FIGS. 9 and 10 around axis 81. Curve 85 was obtained by rotating the arrangement shown in FIG. 8 around axis 82. Curve 86 was obtained by rotating the arrangement shown in FIG. 12 around axis 81. Curve 87 was obtained by rotating the arrangement shown in FIG. 13 around axis 81 or 82.

In FIG. 8, the direction of the peaks and valleys of the optical film 9 is oriented along the polarizing axis 5A of the polarizer 5. In FIG. 12, the direction of the peaks and valleys of the optical film 9 is oriented along the polarizing axis 5A of the polarizer 5. In FIG. 9, two optical films 9 overlap each other, and, the direction of the peaks and valleys of one of the two optical films 9 is perpendicular to the direction of the peaks and valleys of the other of the two optical films 2.

The optical film 10 used in FIG. 10 is shown in FIG. 14. Optical film 10 has a plurality of quadrangular prisms arranged side-by-side in a regular array of rows and columns. A cross-section along line 14A-14B and line 14C-14D is the same as that shown in FIG. 5. The material of the optical film 10 is the same as that of the optical film 9. The single optical film 10 performs the same function as that of the two optical films 9 arranged orthogonal to each other.

The optical films 9 and 10 used in the arrangements shown in FIGS. 8, 9, 10, 12 and 13 have the angle  $B=110$  degrees.

The arrangement shown in FIG. 8 has horizontal viewing angle  $A=0-60$  degrees in which luminance of about 130%-70% is maintained, (as shown in FIG. 7) and has vertical viewing angles  $A=0-43$  degrees in which luminance of about 127%-70% is maintained (as shown in FIG. 6).

The film arrangement shown in FIG. 12 has horizontal viewing angles  $A=0-43$  degrees in which luminance of about 130%-70% is maintained (as shown in FIG. 6) and has a vertical viewing angles  $A=0-60$  degrees in which luminance of about 128%-70% is maintained (as shown in FIG. 7).

The arrangement shown in FIGS. 9 and 10 has a higher luminance (approximately 148%-125%) in the viewing angles  $A=0-30$  degrees, although the luminance in the angles  $A=31-60$  degrees is lower than that represented by curve 85, as shown in FIG. 11.

The arrangement shown in FIG. 13 has a luminance comparable to that of the arrangement shown in FIGS. 9 and 10 at angles of 0-36 degrees, and has a higher luminance than that of the arrangement of FIGS. 9 and 10 at angles of 37-45 degrees.

It is apparent that the optical films 9 and 10 of the present invention increases the luminance of the LCD device at the ordinary viewing angles  $A=\pm 35$  degrees and  $A=\pm 55$  degrees.

The distance between the peaks of the optical film 9 and 10 is defined as the pitch, as shown in FIG. 5. The pitch is selected to prevent interference fringes from being observed by an operator when the optical film 9 or 10 is used in the LCD panel 1. The panel may have gate lines spaced from

each other by 330 micrometers and data lines spaced from each other by 110 micrometers. It has been experimentally found by the inventors of the present invention that no interference fringes have been observed if the pitch is equal to or less than 150 micrometers.

FIG. 15 shows a problem encountered in a prior structure for mounting the fluorescent lamp 7 to the light guide 8. The optical plate 9 or 10 and the reflector plate 12 are mechanically pressed to the light guide 8 by a cylindrical reflector plate 13. The fluorescent lamp 7 is mounted on the reflector plate 13 by supporting members (not shown). When these parts are assembled, end portions 9A or 10A of the optical film 9 or 10 are forced into close contact with the upper surface of the light guide 8, and end portion 12A of the reflector plate 12, which is a white film, is forced into close contact with the lower surface of the light guide 8.

It has been found by the inventors of the present invention that the luminance 71 at the edge portion of the LCD panel is undesirably increased, as shown in FIG. 15, so that image quality is remarkably degraded, and that such increase in the luminance is caused by a separation of end portions 9A, 10A and 12A from the surface of the light guide 8 over a period of time due to the high temperature of the fluorescent lamp 7. More particularly, it has been found that an undesired peak in the luminance is caused mainly by light along paths 72 and 73 which directly passes at a sharp angle X from bottom surface of the light guide 8 without diffuse transmission to the LCD panel, and light along paths 74 and 75 which passes at angle X from the upper surface of the light guide 8.

In accordance with the present invention, to solve the problem, thin coatings 88 are deposited or coated on the edge of the bottom and upper surface of the light guide 8, as shown in FIGS. 2 and 16. Coating 88 is formed of a material which has low transmittance and performs perfect diffuse transmission. Coatings 88 prevent the light from paths 72, 73 and 75 from being directly transmitted from the bottom and upper surfaces of the light guide 8, whereby a uniform or even luminance 82A can be realized, as shown in FIG. 16. The coatings 88 are made of alumina (aluminum oxide) or white paint.

While the invention has been described in connection with specific embodiments, it will be understood that those with skill in the art may be able to develop variations of the disclosed embodiments, without departing from the spirit of the invention or the scope of the following claims.

What is claimed is:

1. A liquid crystal display device including a liquid crystal display panel and a back light device, said back light device comprising:
  - a light source for emitting light;
  - a light guide means having a top surface facing a back surface of said liquid crystal display panel and a side surface receiving said light from said light source;
  - a reflector means provided on a back surface of said light guide means; and
  - an optical film of transparent material positioned between said back surface of said liquid crystal display panel and said top surface of said light guide means, including a first surface having a wave structure including a plurality of regularly spaced isosceles triangles prisms arranged side-by-side, the prisms having smooth surfaces, and a second surface having an optically rough structure for performing diffuse transmission, wherein a top angle of said isosceles triangle prisms is in a range of 95 degrees to 120 degrees for flat, angles prism



surfaces to gather light from the diffuse transmission into a desired viewing angle for the liquid crystal display panel.

2. A liquid crystal display device according to claim 1, wherein a polarizer is positioned between said liquid crystal display panel and said optical film, and a direction along which said peaks and valleys of said isosceles triangle prisms are oriented is aligned in parallel to a polarizing axis of said polarizer and the tops of the isosceles triangle prisms are not farther than 160  $\mu\text{m}$  apart.

3. A liquid crystal display device including a liquid crystal display panel and a back light device, said back light device comprising:

a light source for emitting light;

a light guide means having a top surface facing a back surface of said liquid crystal display panel and a side surface receiving said light from said light source;

a reflector means provided on a back surface of said light guide means; and

two optical films of transparent material positioned between said back surface of said liquid crystal display and said top surface of said light guide means, each of said optical films including a first surface having a wave structure including a plurality of isosceles triangle prisms arranged side-by-side, the prism having smooth surfaces, and a second surface having an optically rough structure for performing diffuse transmission wherein a top angle of said isosceles triangle prisms is in a range of 95 degrees to 120 degrees for flat, angled prism surfaces to gather light from the diffuse transmission by the second surface into a desired viewing angle for the liquid crystal display panel.

4. A liquid crystal display device according to claim 3, wherein a direction along which peaks and valleys of said isosceles triangle prisms of one of said two optical films is oriented is at an angle with respect to a direction along which peaks and valleys of said isosceles triangles prisms of another of said two optical films are oriented.

5. A liquid crystal display device according to claim 3, wherein a polarizer is positioned between said liquid crystal display panel and said two optical films, and a direction along which peaks and valleys of said isosceles triangle prisms of said optical film closer to said polarizer is oriented in parallel to a polarizing axis of said polarizer and the tops of the isosceles triangle prisms are no more than 160  $\mu\text{m}$  apart.

6. A liquid crystal display device including a liquid crystal display panel and a back light device, said back light device comprising:

a light source for emitting light;

a light guide means having a top surface facing a back surface of said liquid crystal display panel and a side surface receiving said light from said light source;

a reflector means provided on a back surface of said light guide means; and

an optical film of transparent material positioned between said liquid crystal display panel and said light guide means, including a first surface having a structure including a plurality of quadrangular prisms, which are substantially the same size and shape, in an orderly matrix of equally spaced prisms, the prisms having smooth surfaces, and a second surface having an optically rough structure for performing diffuse transmission wherein a top angle of said quadrangular prisms is in a range of 95 degrees to 120 degrees for flat, angles

9

sides of the prisms to gather the light from the diffuse transmission of the second surface into the desired viewing angle for the liquid crystal display device.

7. A liquid crystal display device according to claim 6, wherein a polarizer is positioned between said liquid crystal display panel and said optical film, and a direction along 5

662023 63674260

## 10

which peaks and valleys of said quadrangular prisms of said optical film are oriented in parallel to a polarizing axis of said polarizer and the tops of the quadrangle prisms are no more than 160  $\mu\text{m}$  apart.

5

[ \* \* \* \* \* ]

562020 5654260

1        8. An optical film of light transparent material including  
2 a first surface having an optically rough structure for diffuse-  
3 transmitting incident light and a second surface having a wave  
4 structure including a plurality of isosceles triangle prisms  
5 arranged side-by-side substantially throughout said second  
6 surface, the prisms having smooth surfaces for refracting said  
7 light diffuse-transmitted from said first surface and  
8 directionally distributing said diffuse-transmitted light through  
9 said second surface.

10        9. The optical film according to claim 8, wherein a top  
11 angle of said isosceles triangle prisms is in a range of about 90  
12 degrees to about 120 degrees.

13        10. The optical film according to claim 8, wherein said  
14 optical film is positioned within a liquid crystal display, said  
15 optical film further including means for increasing illumination  
16 within and decreasing illumination outside of a viewing angle of  
17 about 35 degrees in the vertical direction and about 55 degrees  
18 in the horizontal direction of the liquid crystal display.

1        11. The optical film according to claim 8, wherein a  
2        polarizer is positioned between a liquid crystal display panel  
3        and said optical film, wherein a direction along which peaks and  
4        valleys of said isosceles triangle prisms are oriented is aligned  
5        in parallel to a polarizing axis of said polarizer.

1        12. The optical film according to claim 8, wherein the tops  
2        of the isosceles triangle prisms are no more than 160  $\mu\text{m}$  apart.

1        13. A liquid crystal display device including a liquid  
2        crystal display panel and a back light device, said back light  
3        device comprising:

4        a light source for emitting light;

5        a light guide having a top surface facing a back surface of  
6        said display panel and a side surface receiving said light from  
7        said light source;

8        a reflector provided on a back surface of said light guide;

9        and

10       an optical film of light transparent material positioned  
11       between said back surface of said liquid crystal display panel  
12       and said top surface of said light guide, said optical film  
13       including a first surface having an optically rough structure for

14 diffuse-transmitting said light from said light guide and a  
15 second surface having a wave structure including a plurality of  
16 isosceles triangle prisms arranged side-by-side substantially  
17 throughout said second surface, the prisms having smooth surfaces  
18 for refracting said light diffuse-transmitted from said first  
19 surface to gather light passing through said second surface in a  
20 direction toward said display panel.

1       14. The liquid crystal display device according to claim  
2 13, wherein a top angle of said isosceles triangle prisms of said  
3 optical film is in a range of about 90 degrees to about 120  
4 degrees for flat, angle prism surfaces to gather light from the  
5 diffuse transmission and directionally distribute said light  
6 within a range defined by a given angle.

1       15. The liquid crystal display device according to claim  
2 13, wherein luminance of  
3 said gathered light is increased within and decreased outside of  
4 a desired viewing angle of about 35 degrees in the vertical  
5 direction and about 55 degrees in the horizontal direction of  
6 said display panel.

1        16. The liquid crystal display device according to claim  
2        13, further including a second optical film positioned between  
3        said back surface of said liquid crystal display panel and said  
4        top surface of said light guide, wherein a direction along which  
5        peaks and valleys of said isosceles triangle prisms of one of  
6        said two optical films are oriented is at an angle with respect  
7        to a direction along which peaks and valleys of said isosceles  
8        triangles prisms of another of said two optical films are  
9        oriented.

10        17. The liquid crystal display device according to claim  
11        16, wherein said angle is perpendicular.

12        18. The liquid crystal display device according to claim  
13        16, wherein a polarizer is positioned between said liquid crystal  
14        display panel and said two optical films, and a direction along  
15        which peaks and valleys of said isosceles triangle prisms of said  
16        optical film closer to said polarizer is oriented in parallel to  
17        a polarizing axis of said polarizer.

1        19. The liquid crystal display device according to claim  
2        13, wherein the tops of the isosceles triangle prisms are no more  
3        than 160  $\mu$ m apart.

1        20. An optical film for use in a liquid crystal display  
2        having a front portion and a back portion, said optical film  
3        comprising:

4        diffusing means for diffuse-transmitting light illuminated  
5        proximal to said back portion of said display; and

6        refracting means including a plurality of isosceles triangle  
7        prisms arranged side-by-side for directionally distributing said  
8        diffuse-transmitted light toward said front portion of said  
9        display and for increasing luminance of light within a viewing  
10       angle of about 35 degrees in the vertical direction and about 55  
11       degrees in the horizontal direction of said front portion of said  
12       display.

1        21. The optical film according to claim 20, wherein a top  
2        angle of said isosceles triangle prisms is in a range of about 90  
3        degrees to about 120 degrees.



1        22. The optical film according to claim 20, wherein the  
2        tops of the isosceles triangle prisms are no more than 160  $\mu$ m  
3        apart.

1        23. The optical film according to claim 20, wherein a  
2        polarizer is positioned between said front portion of said liquid  
3        crystal display and said optical film, wherein a direction along  
4        which peaks and valleys of said isosceles triangle prisms are  
5        oriented is aligned in parallel to a polarizing axis of said  
6        polarizer.

1        24. A film for use in an optical system comprising a light  
2        source and a polarizer having a polarization axis, the film  
3        comprising a transparent material including a first surface and a  
4        second surface, said first surface having a structure including a  
5        plurality of isosceles triangular prisms arranged side by side  
6        for increasing luminance of light passing through said film in a  
7        direction corresponding to said polarization axis of said  
8        polarizer, and said second surface having an optically rough  
9        structure for diffuse transmitting light emitted by said light  
10       source.

1        25. The optical film according to claim 24, wherein a top  
2        angle of said isosceles triangle prisms is in a range of about 90  
3        degrees to about 120 degrees.

1        26. The optical film according to claim 24, wherein said  
2        optical film is positioned within a liquid crystal display, said  
3        prisms having smooth surfaces for gathering diffuse transmitted  
4        light for increasing illumination within and decreasing  
5        illumination outside of a viewing angle of about 35 degrees in  
6        the vertical direction and about 55 degrees in the horizontal  
7        direction of the liquid crystal display.

1        27. The optical film according to claim 24, wherein the  
2        tops of the isosceles triangle prisms are no more than 160  $\mu$ m  
3        apart.

FIG. 1


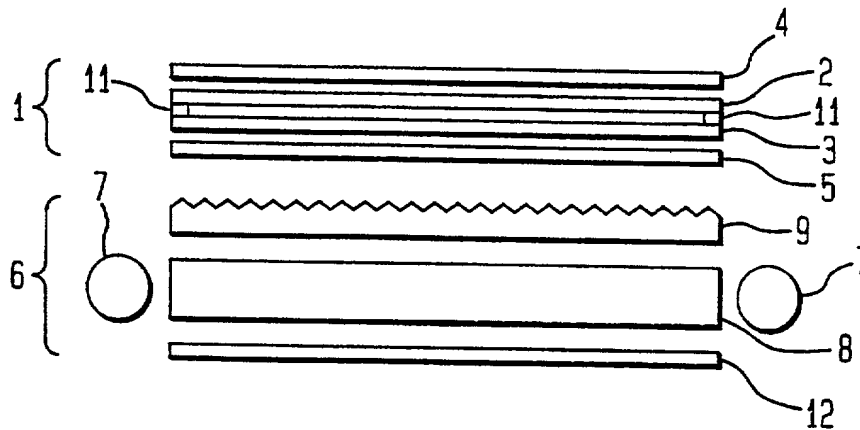


FIG. 2

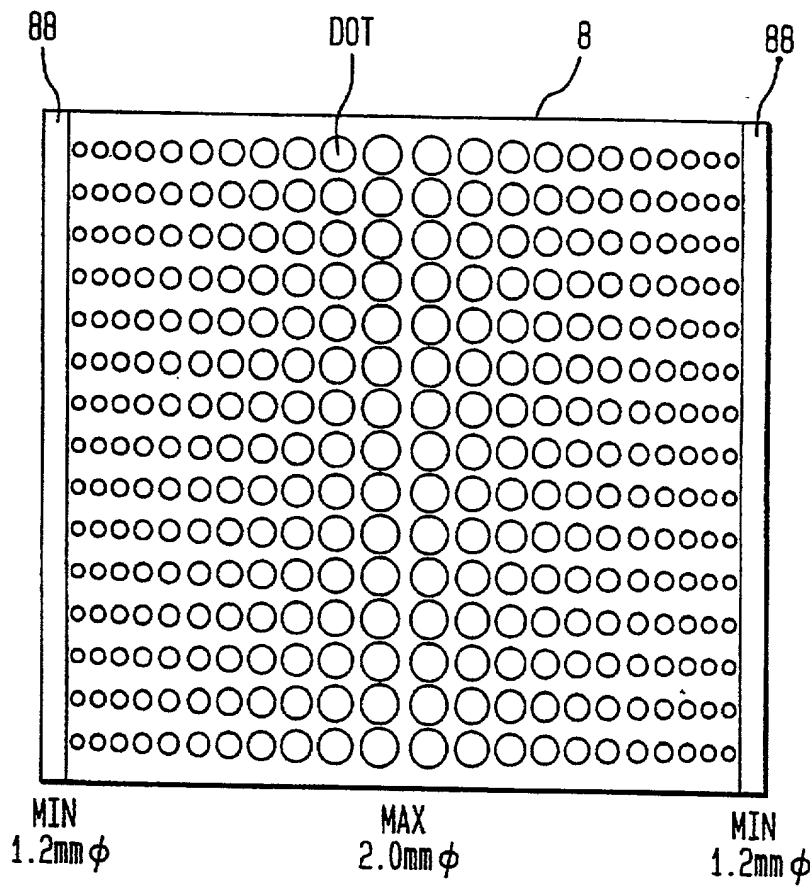

5600462-1-1

FIG. 3

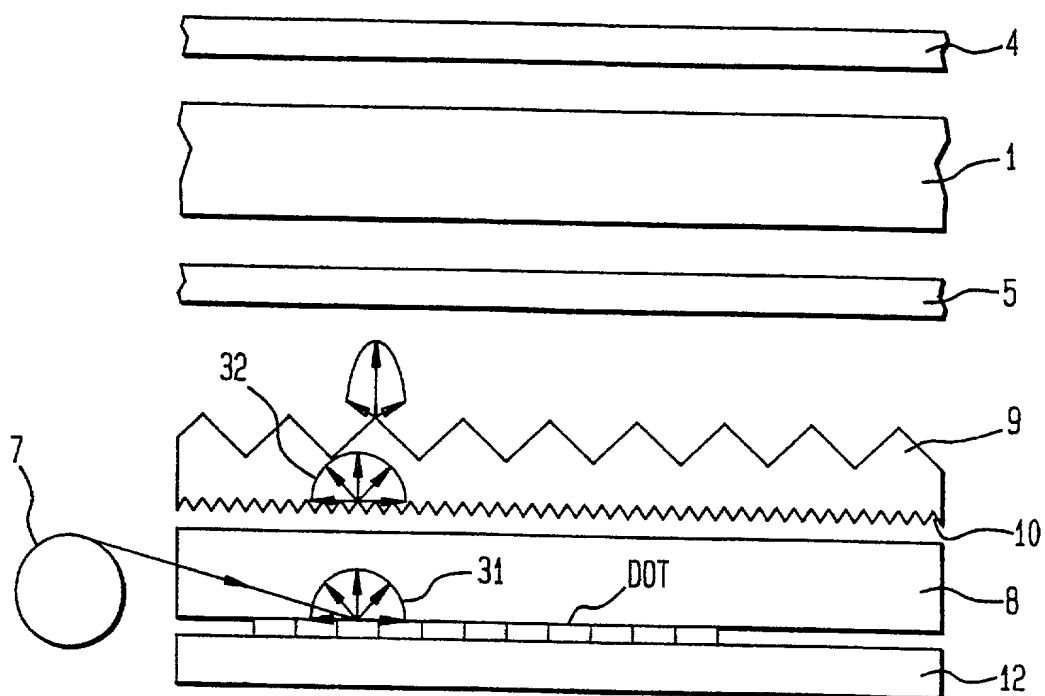


FIG. 4

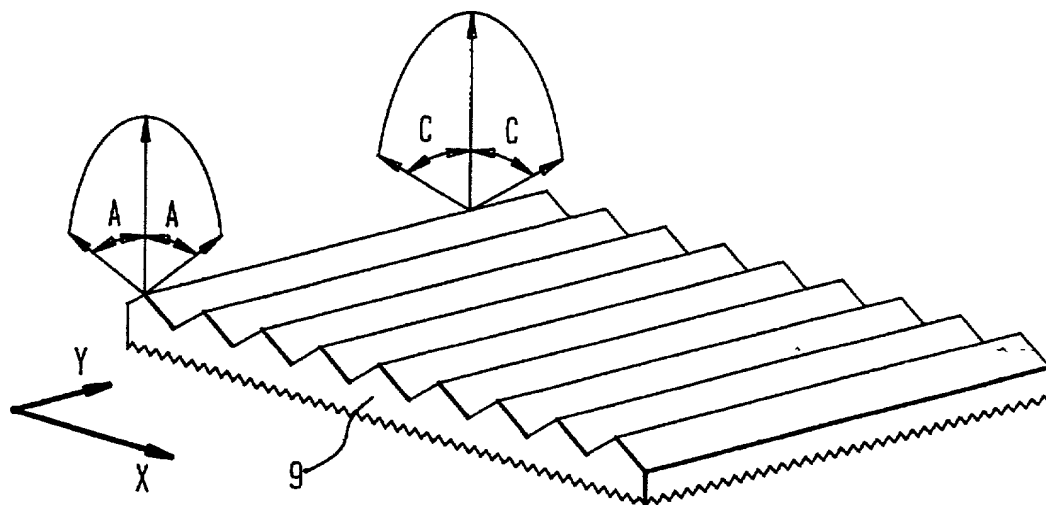


FIG. 5

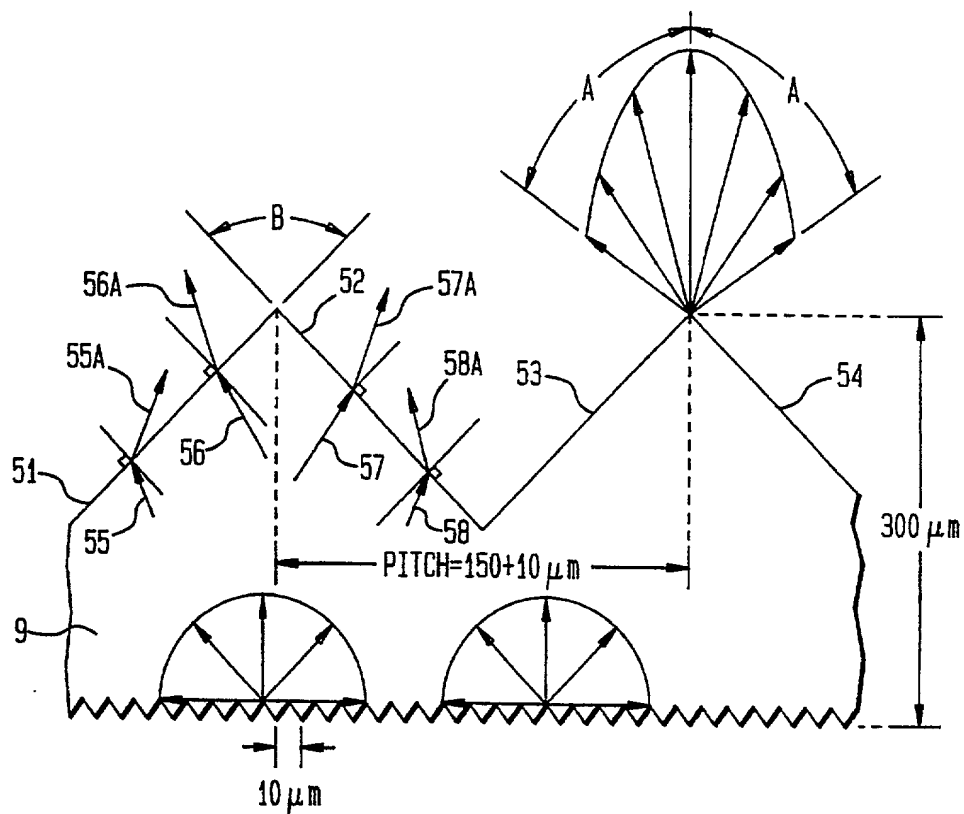


FIG. 14

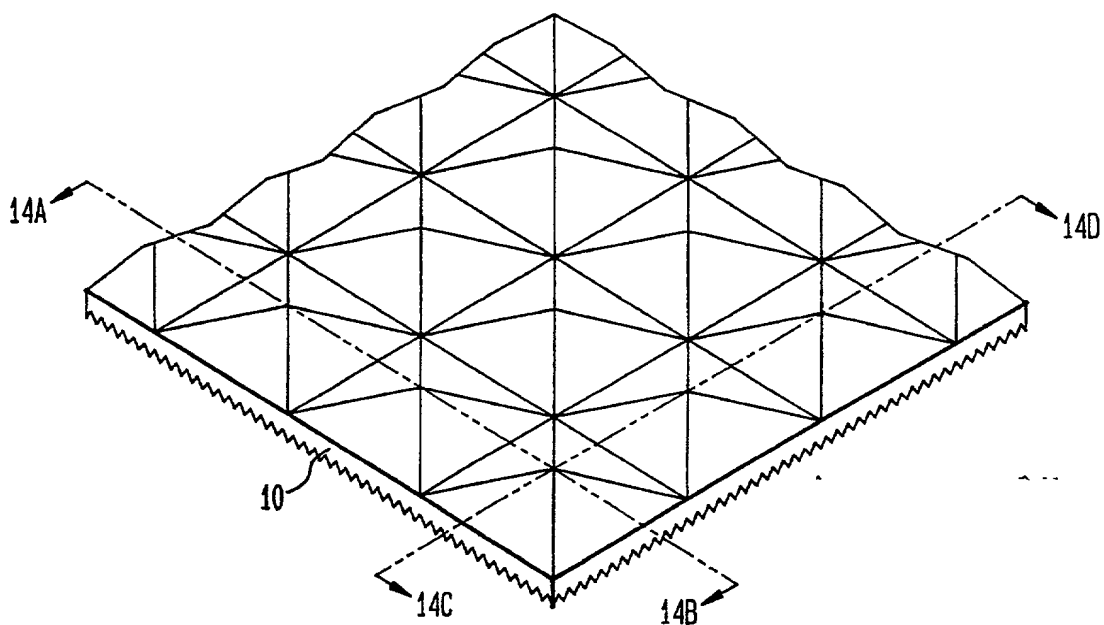


FIG. 6

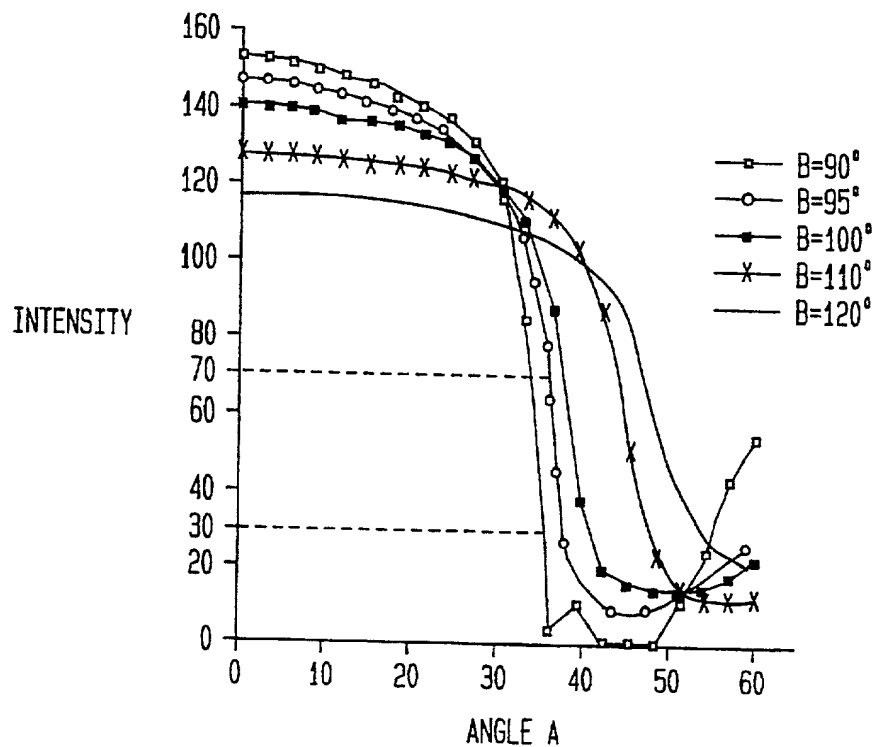


FIG. 7

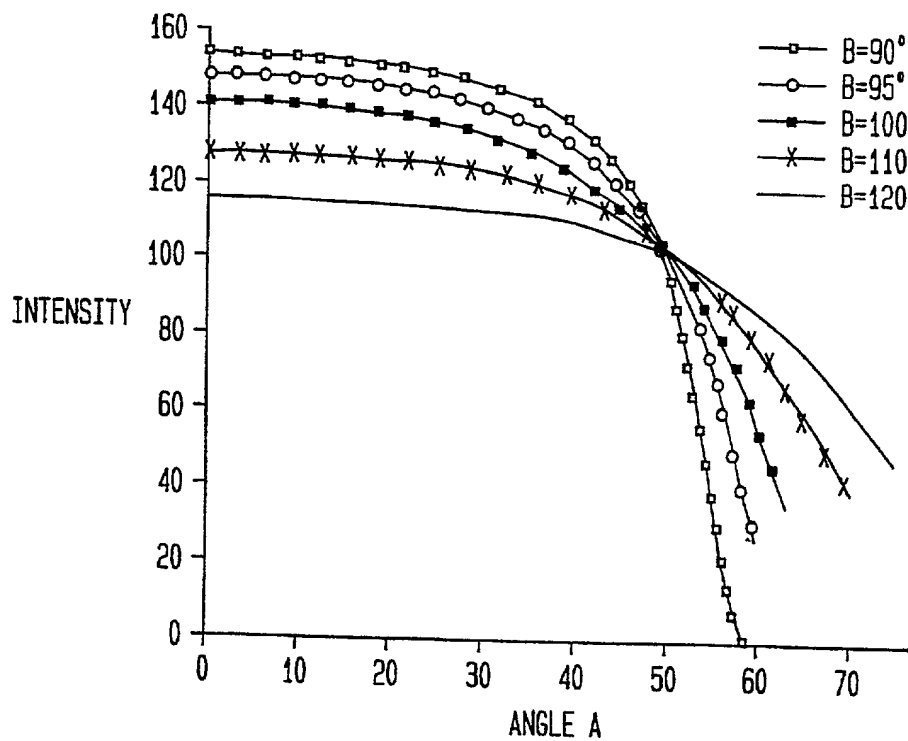


FIG. 8

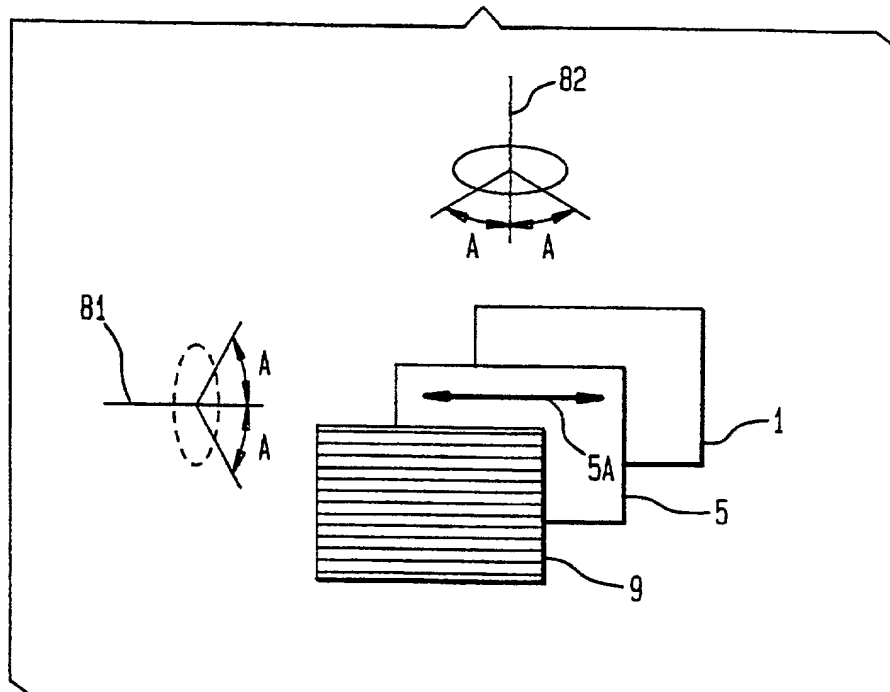


FIG. 9

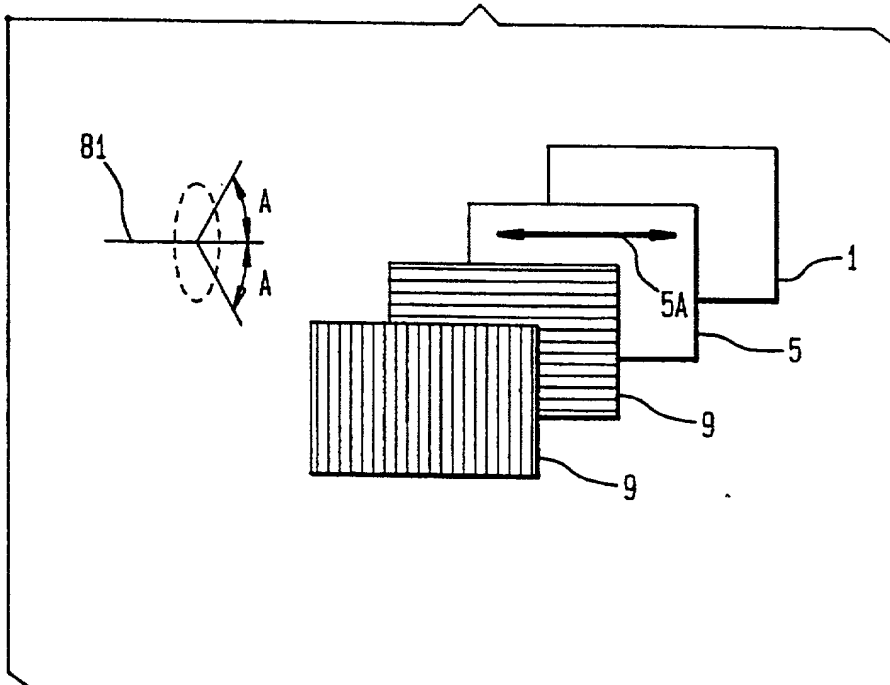


FIG. 10

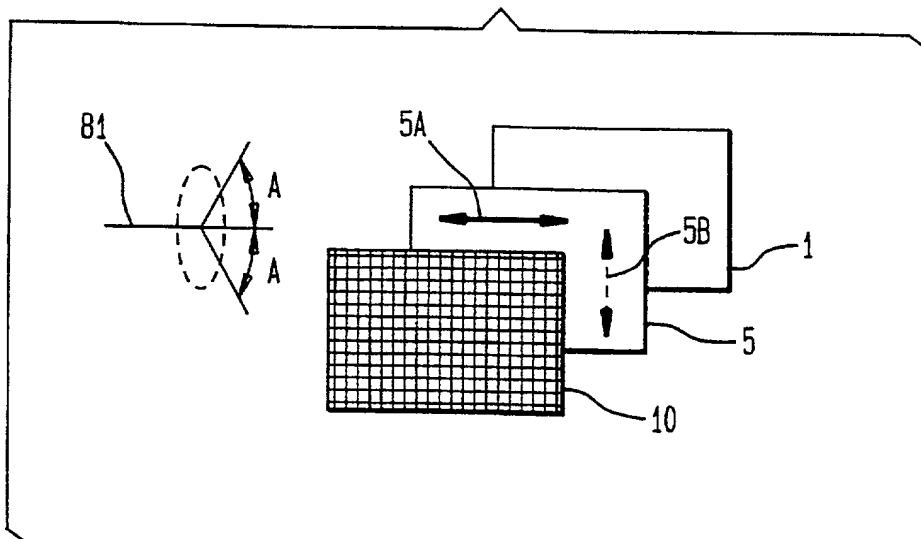


FIG. 11

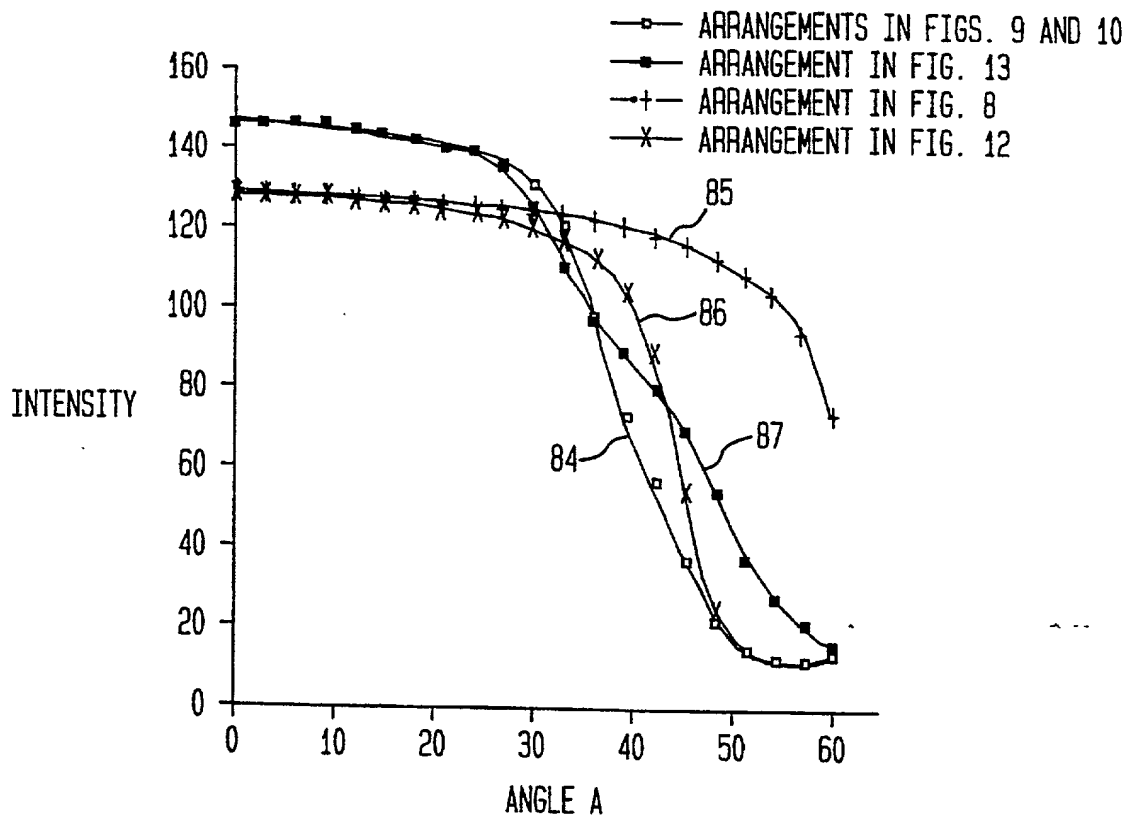




FIG. 12


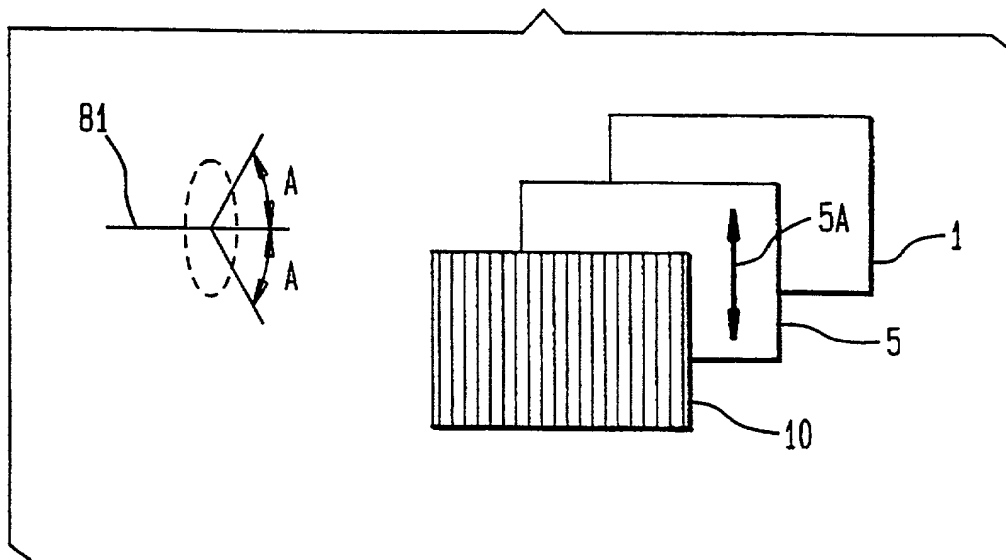


FIG. 13

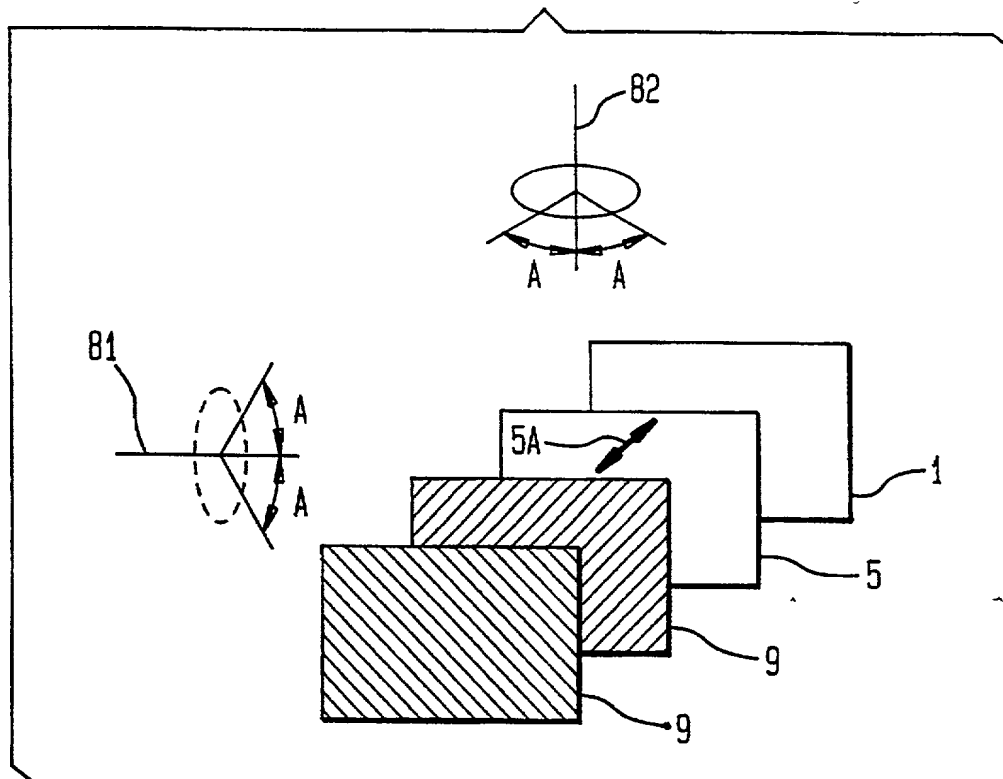

5600462-1

FIG. 15


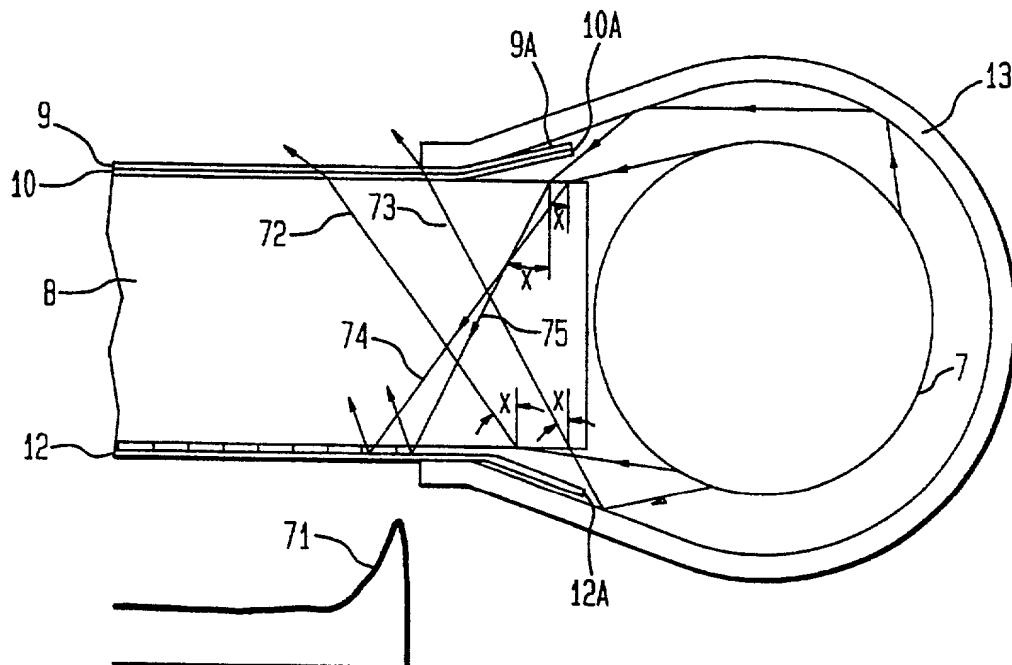


FIG. 16

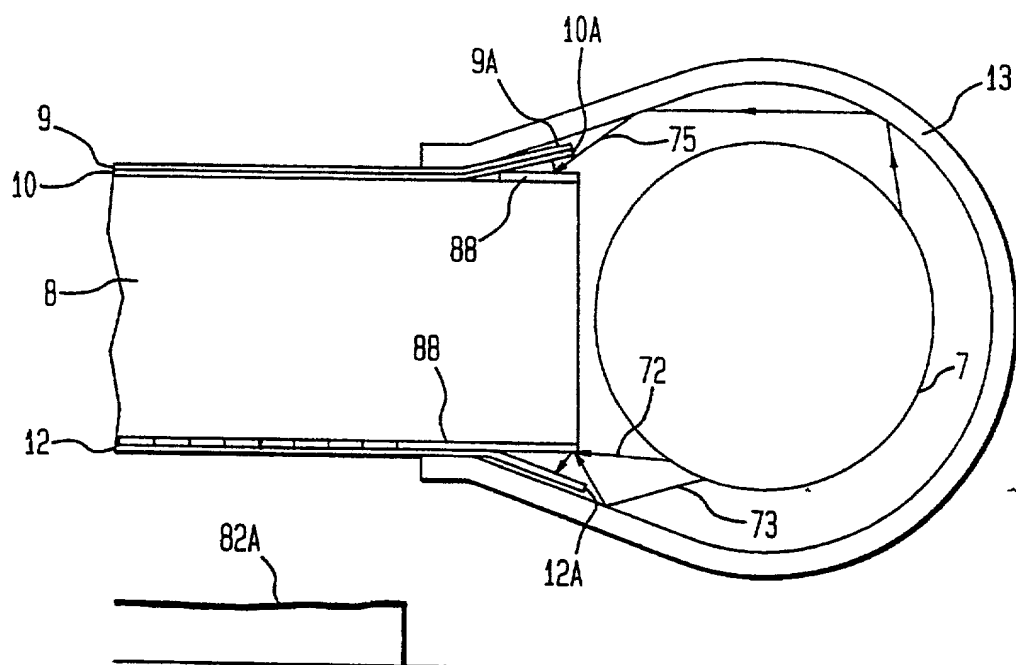

**REISSUE APPLICATION DECLARATION BY THE INVENTOR(S)**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is described and claimed in patent number 5,600,462, granted February 4, 1997, and for which a reissue patent is sought on the invention entitled "Optical Film and Logical Crystal Display Device Using the Film", the specification of which

- ☒ is attached hereto
- ☐ was filed on \_\_\_\_\_ as reissue application number \_\_\_\_/\_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable)

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CRF 1.56.

I verily believe the original patent to be wholly or partly inoperative or invalid, for the reasons described below. (Check all boxes that apply.)

- ☐ by reason of a defective specification or drawing.
- ☒ by reason of the patentee claiming more or less than he had the right to claim in the patent.
- ☐ by reason of other errors.

At least one error upon which reissue is based is described as follows:

1. I intended to describe and claim a feature of my invention of enhancing illumination through a film by "directionally distributing [diffused light] from smooth surfaces of the prisms". Such feature is shown in the drawings as filed in the original application from which the '462 patent issued. (See, for example, Figure 5, 55A, 56A, 57A, 58A and angle 'A'). Such feature was not claimed in the application and is not in the claims of the '462 patent.

2. Each of claims 1 to 7 of the '462 patent requires "a top angle of said isosceles triangle prisms in a range of 95 degrees to 120 degrees". I intended only that a top angle of about 90 degrees to about 120 degrees be required. A top angle of 90 degrees to 120 degrees was claimed in the initial filing of the original application from which the '462 patent issued.

These deficiencies arose after the filing of the original application from which the '462 patent issued and were caused by the failure of the patent attorney in appreciating the full scope of my invention.

All errors corrected in this reissue application arose without any deceptive intention on the part of the applicant. As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

**MANNY W. SCHECTER**, Reg. No. 31,722; **TERRY ILARDI**, Reg. 29,936; **CHRISTOPHER A. HUGHES**, Reg. No. 26,914; **EDWARD A. PENNINGTON**, Reg. No. 32,588; **JOHN E. HOEL**, Reg. No. 26,279; **JOSEPH C. REDMOND, Jr.**, Reg. No. 18,753; **ROBERT P. TASSINARI, Jr.**, Reg. No. 36,030; **DOUGLAS W. CAMERON**, Reg. No. 31,596; **KEVIN M. JORDAN**, Reg. No. 40,277; **STEPHEN C. KAUFMAN**, Reg. No. 29,551; **DANIEL P. MORRIS**, Reg. No. 32,053; **LOUIS J. PERCELLO**, Reg. No. 33,206; **JAY P. SBROLLINI**, Reg. No. 36,266; **ROBERT M. TREPP**, Reg. No. 25,933; **DAVID M. SHOFL**, Reg. No. 39,835; **LOUIS P. HERZBERG**, Reg. No. 41,500; and **PAUL J. OTTERSTEDT**, Reg. No. 37,411; each of them of **INTERNATIONAL BUSINESS MACHINES CORPORATION**, Thomas J. Watson Research Center, P.O. Box 218, Yorktown Heights, New York 10598.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false

662020 6867260

statements and the like so made are punishable by fine and imprisonment, or both, under 18 U.S.C. 1001, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this declaration is directed.

Full name of sole or first inventor: Masaru Suzuki

M. Suzuki  
Inventor's signature  
1716-1-A511, Bukko-cho, Hodogaya-ku,  
Yokohama-shi, Kanagawa-ken, Japan  
Residence 26 JAN 1999 Date  
Same as above Japan  
Post Office Address Citizenship

Full name of second inventor: Fumihisa Hanzawa

Fumihisa Hanzawa  
Inventor's signature  
1-31-11-103, Akanedai, Aoba-ku,  
Yokohama-shi, Kanagawa-ken, Japan  
Residence 26 JAN 1999 Date  
Same as above Japan  
Post Office Address Citizenship

Full name of third inventor:

Inventor's signature  
Residence Date  
Post Office Address Citizenship

652020 652020

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**APPLICANT(S):** Suzuki et al.

**FOR:** Reissue of Patent No. 5,600,462

**PRIOR GROUP:** Art Unit 2515

**FOR:** OPTICAL FILM AND A LIQUID CRYSTAL DISPLAY  
DEVICE USING THE FILM


**ASSOCIATE POWER OF ATTORNEY**

Please recognize **FRANK CHAU**, Reg. No. 34,136; **JAMES J. BITETTO**, Reg. No. 40,513, and **GASPARE J. RANDAZZO**, Reg. No. 41,528; each of them of **F. CHAU & ASSOCIATES, LLP**, 1900 Hempstead Turnpike, Suite 501, East Meadow, New York 11554 as associate attorneys in the above-mentioned application, with full power to prosecute said application, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

Telephone calls should be made to Frank Chau by dialing (516) 357-0091.

All written communications are to be sent to Frank Chau, Esq.,  
**F. Chau & Associates, I.L.P.**, 1900 Hempstead Turnpike, Suite 501, East Meadow,  
New York 11554.

International Business Machines  
Corporation  
T.J. Watson Research Center  
Route 134 and Kitchawan Road  
Yorktown Heights, New York 10598

  
Manny W. Schecter  
Registration No. 31,722  
Jay P. Sbrollini  
Registration No. 36,266  
Attorney for Applicant(s)